




STANNY IMP



Taper Shank for NBH2084 Boring System

Model	Type	NW.
R8		1.0
NT30	inch or mm	0.8
NT40	inch or mm	1.2
NT50	inch or mm	3.6
BT40	MAS403	1.8
BT50	MAS403 A or B	4.5
ISO40	DIN69871A	1.7
ISO50	DIN69871A	4.0

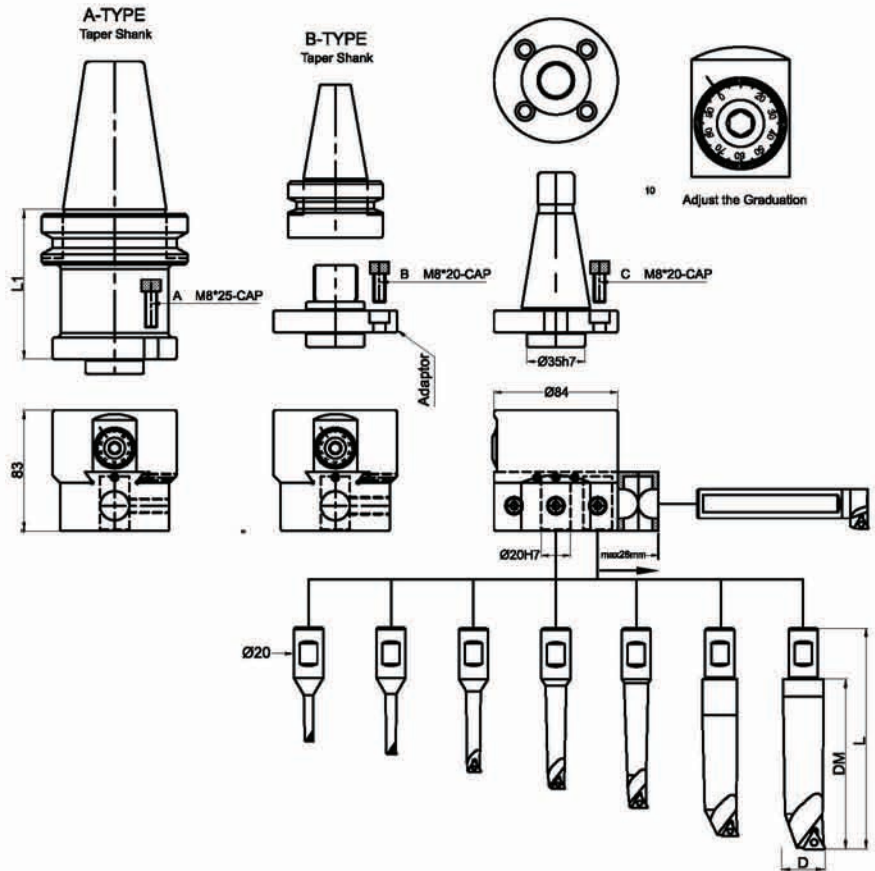

Body for NBH2084 Boring System


Model	Cutting Bar	Wrench	NW.
NBH2084	Ø 20	○4 ○6	3.0



Cutting Bar for NBH2084 Boring System

Model	Boring Range ØDmin ~ Ødmax	DM	L	System	Insert	Bolt	Wrench	NW.
BJ2008-32	8 ~ 11	32	80	NBH2084	TBGT0601..L	SB-1STR-M2	T6	0.12
BJ2010-40	10 ~ 13	40	87					
BJ2012-53	12 ~ 17	53	98		TPGH0902..L	SB-2TR-M2.5	T8	0.16
BJ2016-68	16 ~ 21	68	110					
BJ2020-83	20 ~ 130	83	123		TPGH1103..L	SB-3TR-M3	T8	0.22
BJ2025-96	25 ~ 135	96	137					0.24
BJ2030-115	30 ~ 140	115	152					0.38
BJ2020-L	120 ~ 280	84+BT L1	100					0.46

STANNY IMP

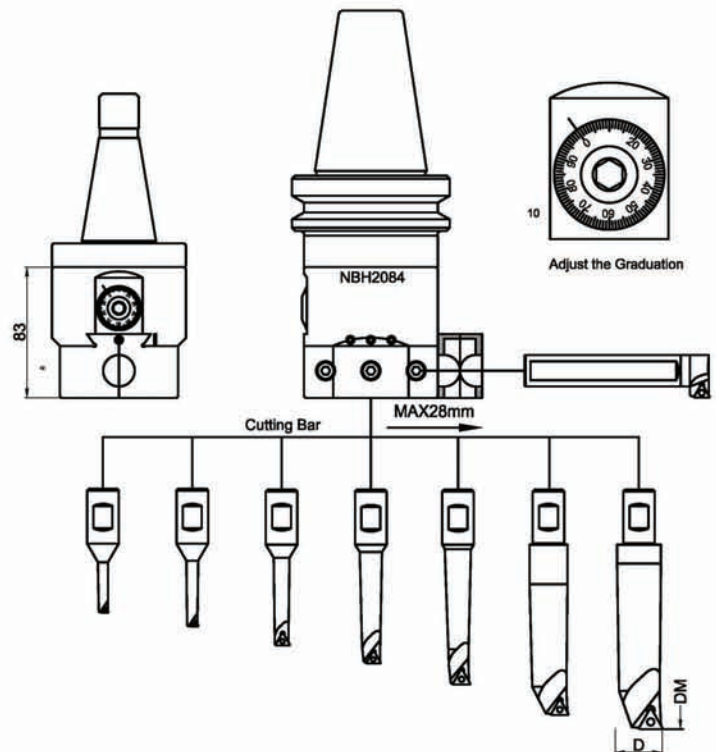

Model	Boring Range ØDmin ~ Ødmax	Taper Shank	NW.
R8-NBH2084	8 ~ 280	R8-UNF7/16-20-NBH2084	10.0
NT30-NBH2084	8 ~ 280	DIN2080 ISO30-NBH2084	9.8
NT40-NBH2084	8 ~ 280	DIN2080 ISO40-NBH2084	10.3
NT50-NBH2084	8 ~ 280	DIN2080 ISO540-NBH2084	10.8
MT4-NBH2084	8 ~ 280	DIN228A MT4-NBH2084	10.3
MT5-NBH2084	8 ~ 280	DIN228A MT5-NBH2084	10.8
BT40-NBH2084	8 ~ 280	MAS403 BT40-NBH2084	9.0
BT50-NBH2084	8 ~ 280	MAS403 BT50-NBH2084	11.7
SK40-NBH2084	8 ~ 280	DIN69871A ISO40-NBH2084	10.7
SK50-NBH2084	8 ~ 280	DIN69871A ISO50-NBH2084	13.0

Cutting Bar	Boring Range ØDmin ~ Ødmax	DM	Insert	Bolt	Wrench	NW.
BJ2008-32	8 ~ 11	32	TBGT0601..L	SB-1STR-M2	T6	0.12
BJ2010-40	10 ~ 13	40				
BJ2012-53	12 ~ 17	53	TPGH0902..L	SB-2TR-M2.5	T8	
BJ2016-68	16 ~ 21	68				
BJ2020-83	20 ~ 130	83	TPGH1103..L	SB-3TR-M3	T8	0.22
BJ2025-96	25 ~ 135	96				0.24
BJ2030-115	30 ~ 140	115				0.38
BJ2020-L	120 ~ 280	84+BT L1				0.46