


## NR HIGH SPEED PRECISION COLLET CHUCKS, HSK

ACROW IMP

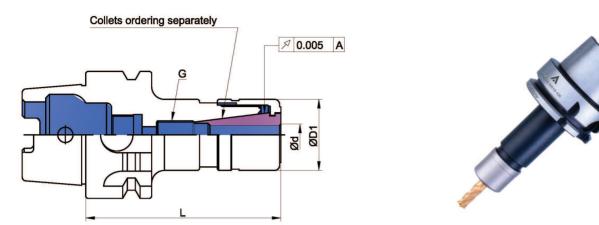

\*Caution: Excessive tightening torque will damage the chuck, nut or / and collet permanently!

| Part No.        | Ød Range     | ØD   | L  | G         | Collets | Wrench | Max. rpm |
|-----------------|--------------|------|----|-----------|---------|--------|----------|
| HSK40A-NR10-080 | Ø3.0 ~ Ø10.0 | 27.5 | 80 | M10*P1.50 | NR10    | W-D27  | 40,000   |

| HSK40E-NR10-060 | Ø3.0 ~ Ø10.0   | 27.5 | 60 | M10*P1.50 | NR10 | W-D27 | 40,000 |
|-----------------|----------------|------|----|-----------|------|-------|--------|
| -NR10-080       |                |      | 80 |           |      |       |        |
| -NR16-070       | — Ø4.0 ~ Ø16.0 | 40   | 70 | M12*P1.75 | NR16 | W-D40 | 30,000 |
| -NR19-090       |                |      | 90 |           |      |       |        |

| HSK50E-NR10-080 | Ø3.0 ~ Ø10.0 | 27.5 | 80  | M10*P1.50 | NR10 | W-D27 | 30,000 |
|-----------------|--------------|------|-----|-----------|------|-------|--------|
| -NR16-100       | Ø4.0 ~ Ø16.0 | 40   | 100 | M12*P1.75 | NR16 | W-D40 | 25,000 |

| HSK63A-NR10-100 | Ø3.0 ~ Ø10.0 | 27.5 | 100 | M10*P1.50 | NR10 | W-D27 | 30,000 |
|-----------------|--------------|------|-----|-----------|------|-------|--------|
| -NR16-120       | Ø4.0 ~ Ø16.0 | 40   | 120 | M12*P1.75 | NR16 | W-D40 | 25,000 |